

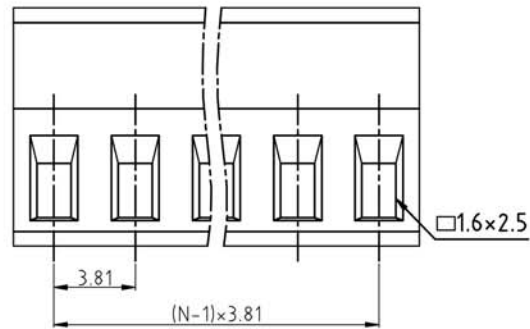


SIGN	DESCRIPTION	DATE	APPROVER

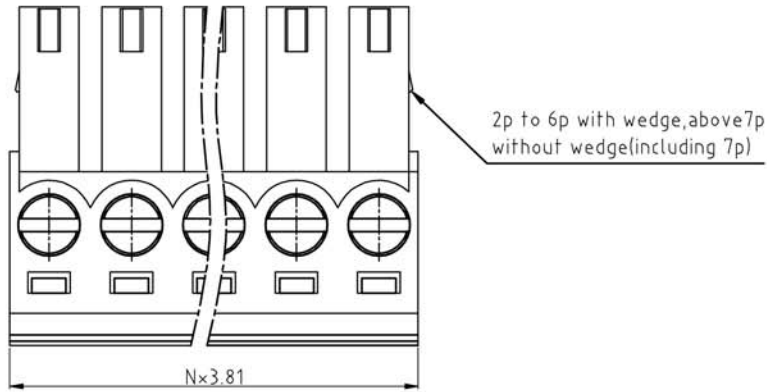

N=Number of contacts

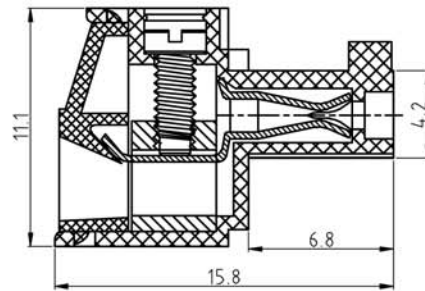

Technical Data:

Material:

Contact(metal housing): Copper Alloy with Ni plated

Terminal screw: Steel galvanized with Cr3+ plated

Wire guard: Copper Alloy, Tin plated.

Insulator body(housing): Polyamide(UL94V-0)

Electrical

Voltage rating: 300VAC

Current rating: 12 Amps/way max

Contact resistance: $20m\Omega$ (max)

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Wire range: 16-24AWG

Mechanical:

Torque: 2.5kgf.cm/M2

Operating temperature: -40°C to $+105^{\circ}\text{C}$

Soldering reliability:

Test temperature= $250^{\circ}\text{C} \pm 10^{\circ}\text{C}$

5 seconds max

Ordering Information:

F73 - 5 - C XX - X 0 0 X 0

2	02	5	Green
-	-	6	Blue
24	24	8	Grey
		A	Black
		1	"-" SCREW
		2	"-/+ " SCREW

WELINK 上海拓尔普电子科技有限公司
Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME:
X: ± 0.50	CHECKED:	F73-5 Pitch 3.81mm
X.X: ± 0.30	DRAWN: Yang Ming 2012.06.20	-series
X.XX: ± 0.20	UNITS: mm	PART NO: F735CXX100X0
X°: $\pm 1^{\circ}$	REV: A	DWG NO: 9F735C001A
	SCALE: 4 / 1	PAGE: 1 / 1