

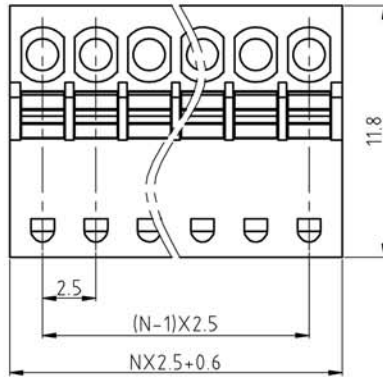


SIGN	DESCRIPTION	DATE	APPROVER

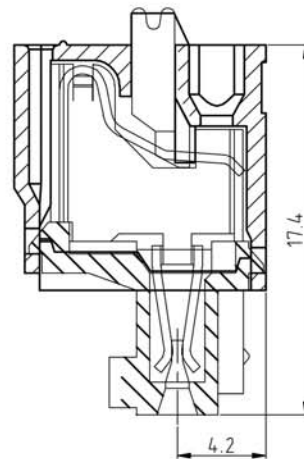

N=Number of contacts

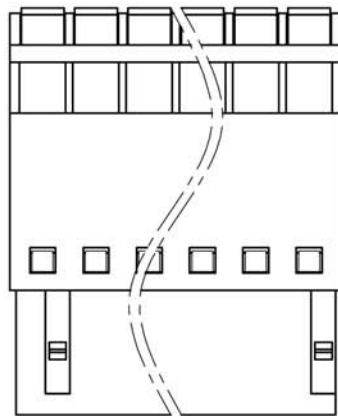

Technical Data:

Material:

- Terminal: Copper Alloy, Tin plated.
- Wire guard: Copper Alloy
- Insulator body(housing): Polyamide(UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 12 Amps/way max
- Contact resistance: 20mΩ(max)
- Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs
- Wire range: 16-24AWG

Mechanical:

- Operating temperature: -40°C to +105°C
- Soldering reliability:
 - Test temperature= 250°C±10°C
 - 5 seconds max

Ordering Information:

F73 - H - 2 XX - 0 0 0 X 0

- 2 02
-
- 24 24
- 5 Green
- 6 Blue
- 8 Grey
- A Black

WELINK 上海拓尔普电子科技有限公司
Welink International Co., LTD.

TOLERANCE X: ±0.50 X.X: ±0.30 X.XX: ±0.20 X°: ±1°	APPROVED:	NAME: F73 - H - pitch 2.5mm - series
	CHECKED:	
	DRAWN: Yang Ming 2012,06,20	
	UNITS: mm	REV: A
	SCALE: 4 / 1	PAGE: 1 / 1
		PART NO: F73H2XX000X0
		DWG NO: 9F73H2001A