





SIGN	DESCRIPTION	DATE	APPROVER

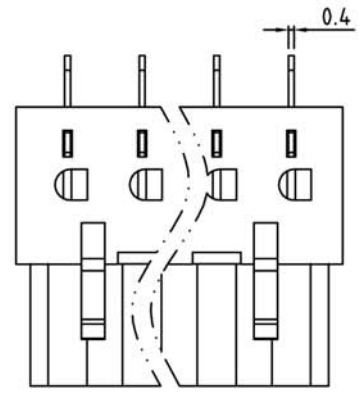

N=Number of contacts

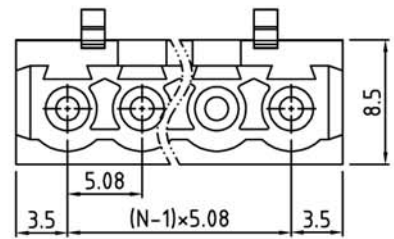

P.C.B LAYOUT

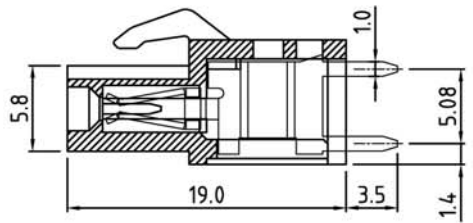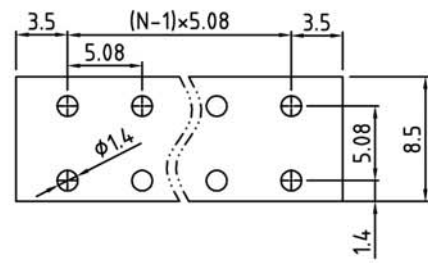

Technical Data:
 Material:
 Solder Pin: Copper Alloy with Tin plated
 Insulator body(housing): Polyamide(UL94V-0)
 Electrical
 Voltage rating: 300VAC
 Current rating: 16 Amps/way max
 Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs
 Mechanical:
 Operating temperature: -40°C to +105°C
 Soldering reliability:
 Test temperature= 250°C±10°C
 5 seconds max

Ordering Information:
 F75-2-E XX-0 0 0 X 0

- 2 02
- 4 04
- 20 20
- 5 Green
- 6 Blue
- A Black
- 1 Without flange
- 2 With flange Screw
- 3 With flange Screw nut
- 1 180°
- 2 90°

WELINK 上海拓尔普电子科技有限公司
 Welink International Co.,LTD.

TOLERANCE X. ±0.50 X.X ±0.30 X.XX ±0.20 X° ±1°	APPROVED: CHECKED: DRAWN: Ling Yu 2013,08,05	NAME: F75 - 2 - pitch 5.08mm - series Without flange -180D
UNITS: mm	REV: A	PART NO: F752EXX011X0
SCALE: 3 / 1	PAGE: 1 / 1	DWG NO: 9F752E011A