
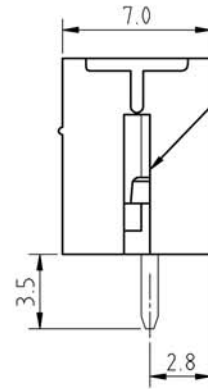


SIGN	DESCRIPTION	DATE	APPROVER
△	-----		TONY

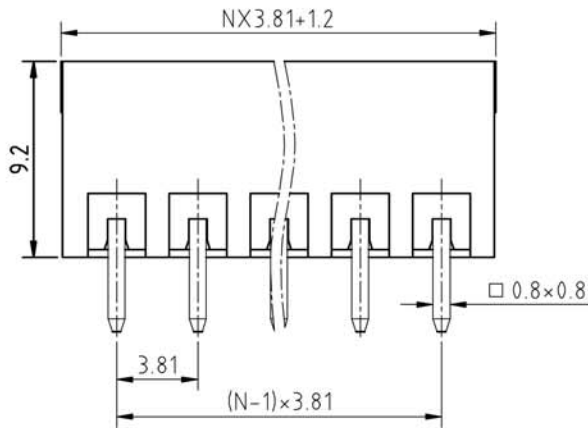

2~6 Poles 爲開口式的
7 Poles 或以上爲封閉式

Technical Data:

Material:

Solder Pin: Copper Alloy Tin plated

Insulator body(housing): Polyamide(Glass filled)(UL94V-0)

Electrical

Voltage rating: 300VAC

Current rating: 12 Amps/way max

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Mechanical:

Operating temperature: -40°C to +105°C

Soldering reliability:


Test temperature= 250°C±10°C

5 seconds max


Ordering Information:

F83-5-C XX 0 0 0 X 0

02	2Pin	5	Green
To	To	6	Blue
24	24Pin	A	Black

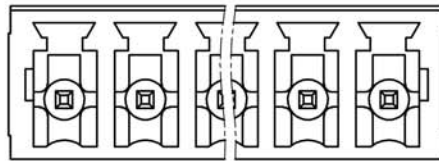

N=Number of contacts

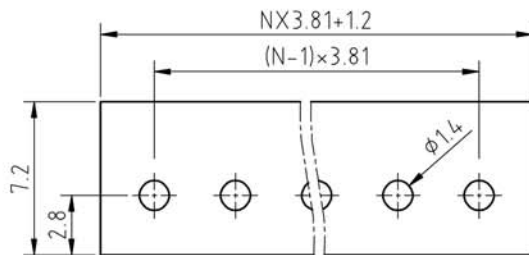

P.C.B. LAYOUT

WELINK 上海拓尔普电子科技有限公司
Welink International Co.,LTD.

TOLERANCE	APPROVED:	NAME:
X ±0.50	CHECKED:	F83-5 3.81mm
X.X ±0.30	DRAWN: YangMing 2012,06,20	Vertical Series
X.XX ±0.20	UNITS: mm	REV: A
X° ±1°	SCALE: 4 / 1	PAGE: 1 / 1
		PART NO: F835CXX000X0
		DWG NO: 9F835C001A