
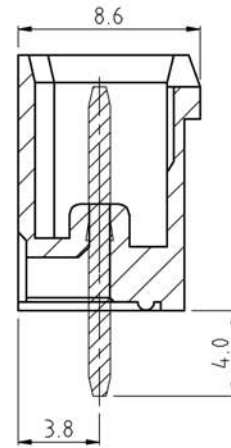


SIGN	DESCRIPTION	DATE	APPROVER

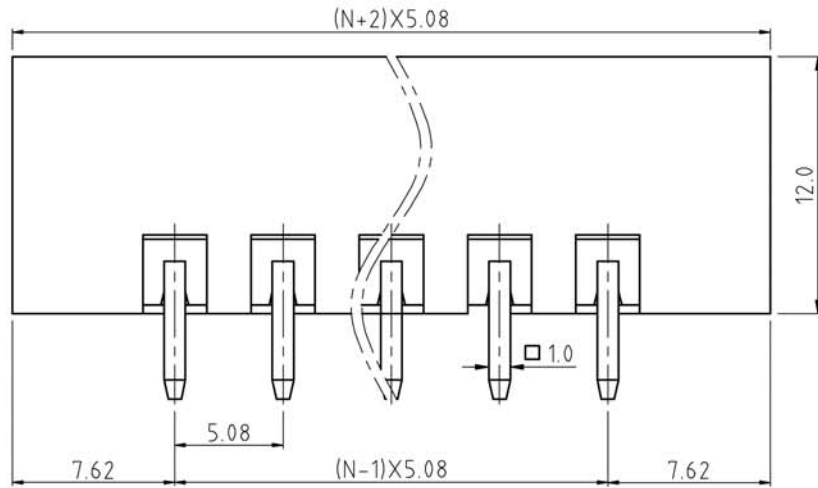

Technical Data:

Material:

Solder Pin: Copper Alloy, Tin plated

Metal nut: Copper Alloy

Insulator body(housing): Polyamide
(Glass filled)(UL94V-0)

Electrical

Voltage rating: 300VAC

Current rating: 16A

Withstanding Voltage: AC 2500V(1min)

Mechanical:

Using temperature Range: -40°C to +105°C



Soldering temperature: +250°C, 5seconds Max.

Ordering Information:

F85-6-E XX-0 0 0 X 0

02	2Pin	5	Green
To	To	6	Blue
24	24Pin	A	Black

N=Number of contacts

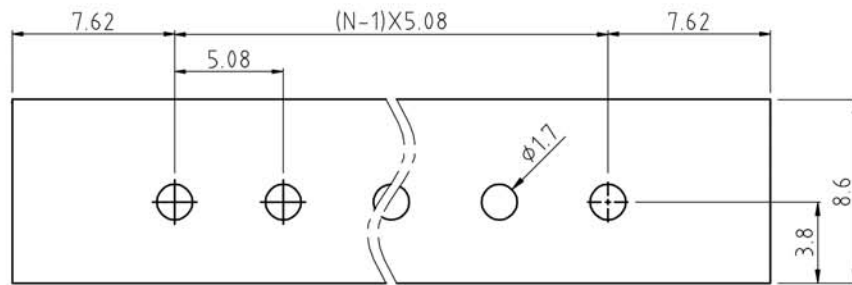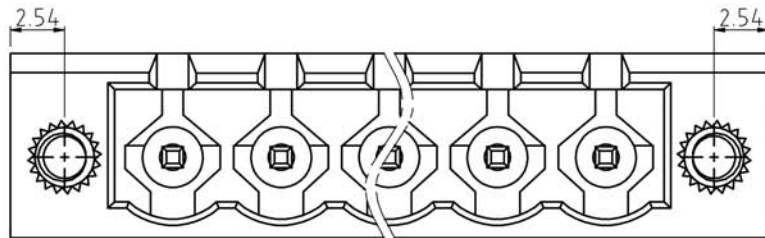

P.C.B. LAYOUT

WELINK 上海拓尔普电子科技有限公司
Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME: F85-6 Pitch 5.08mm
X: ±0.50	CHECKED:	- Series
X.X: ±0.30	DRAWN: YangMing 2012,06,20	PART NO: F856EXX000X0
X.XX: ±0.20	UNITS: mm	REV: A
X°: ±1°	SCALE: 4 / 1	PAGE: 1 / 1
		DWG NO: 9F856E001A