
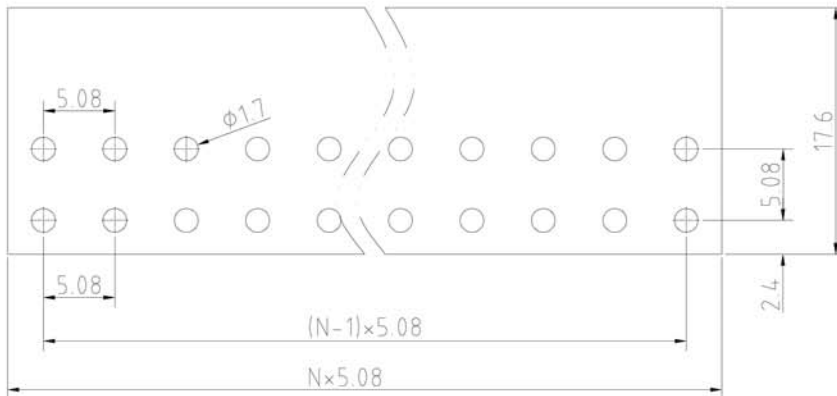
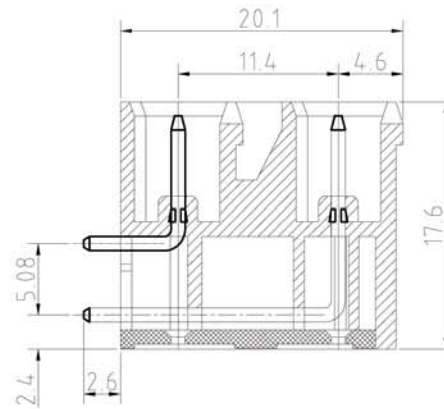


N=Number of contacts

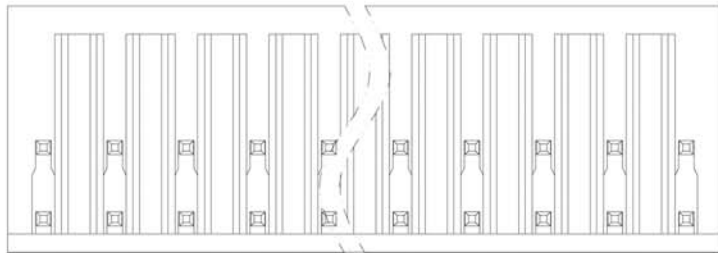

P.C.B. LAYOUT

SIGN	DESCRIPTION	DATE	APPROVER

Technical Data:

Material:

Solder Pin: Copper Alloy with Tin plated  
 Insulator body(housing): Polyamide  
 (Glass filled)(UL94V-0)

Electrical

Voltage rating: 300VAC

Current rating: 16A

Withstanding Voltage: AC 2500V(1min)

Mechanical:

Using temperature Range: -40°C to +105°C

Soldering temperature: +250°C, 5seconds Max.

Ordering Information:

F85-R-E XX-0 0 0 X 0 0 0 0

02 2Pin  
 To To  
 24 24Pin

5 Green  
 6 Blue  
 A Black

0 Open  
 1 Close  
 2 Screw nut  
 3 Square nut  
 4 W/Latch holder

0 180°  
 1 90°

**WELINK**

上海拓尔普电子科技有限公司

Welink International Co.,LTD.

TOLERANCE	APPROVED:	NAME:
X. ±0.50	CHECKED:	F85-R Pitch 5.08mm
X.X ±0.30	DRAWN: Ling Yu 2014,09,18	-Series-90° (Open)
X.XX ±0.20	UNITS: mm	PART NO: F85REXX010X0000
X° ±*	SCALE: 2.5 / 1	DWG NO: 9F85RE001A
	REV: A	
	PAGE: 1 / 1	