

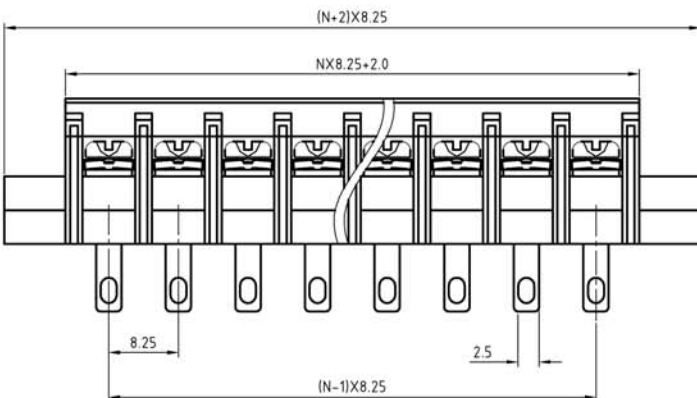
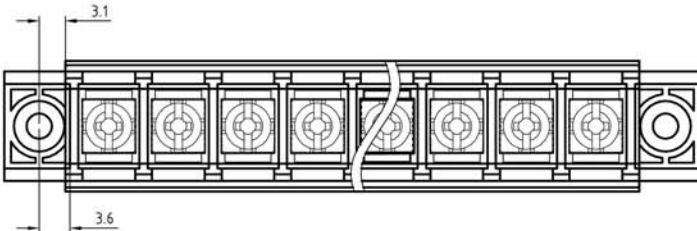


SIGN	DESCRIPTION	DATE	APPROVER

N=Number of contacts

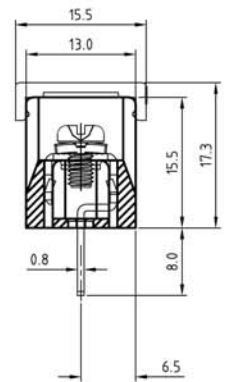

P.C.B LAYOUT

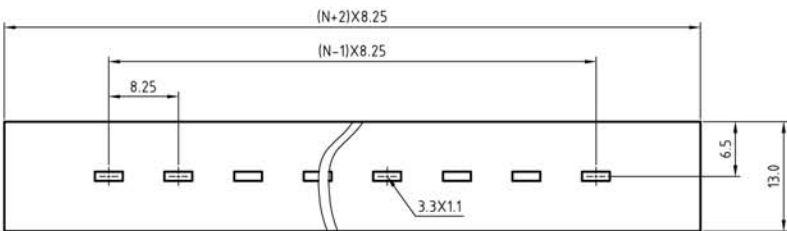

Technical Data:

Material:

- Terminals: Copper Alloy, Tin Plated
- Terminal screw: Steel galvanized with Cr3+ plated
- Cover: PC (UL94V-0)

Insulator body (housing): Polyamide (Glass filled) (UL94V-0)

Electrical

- Voltage rating: 250VAC
- Current rating: 20 Amps/way max
- Contact resistance: 20mΩ (max)
- Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs
- Wire range: 14-22AWG

Mechanical:

- Torque: 7.0kgf.cm/M3.0
- Operating temperature: -40°C to +105°C
- Soldering reliability: Test temperature= 250°C±10°C, 5 seconds max

Ordering Information:

U240 -4 - H XX - X X X 0

- A Black Pa66
- B Black Pbt
- 1 With flange
- 2 Without flange
- 1 "-" Screw Cr<sup>3+</sup>
- 2 "-/" Screw Cr<sup>3+</sup>
- 3 "-" Screw Ni Plated
- 4 "-/" Screw Ni Plated
- 02 2Pin
- To To
- 32 32Pin

**WELINK** 上海拓尔普电子科技有限公司  
Welink International Co., LTD.

TOLERANCE X. ±0.50 X.X ±0.30 X.XX ±0.20 X° ±1°	APPROVED:	NAME: U240-4 Pitch 8.25mm series With flange
	CHECKED:	
	DRAWN: Yang Ming 2013,10,21	
	UNITS: mm	REV: A
	SCALE: 1.5 / 1	PAGE: 1 / 1
		PART NO: U2404HXX21B0
		DWG NO: 9U2404101A