

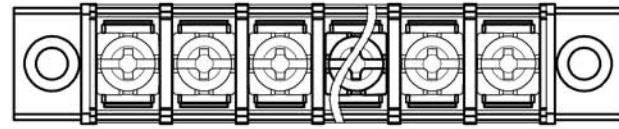


1 2 3 4 5


SIGN	DESCRIPTION	DATE	APPROVER

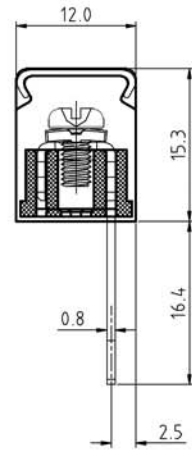

N=Number of contacts

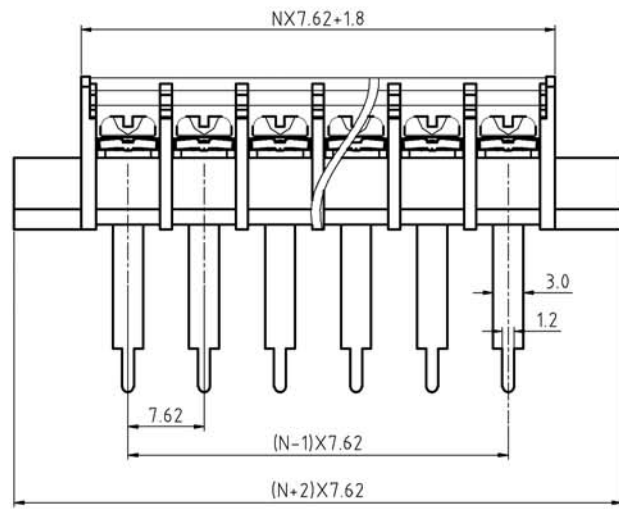

P.C.B LAYOUT

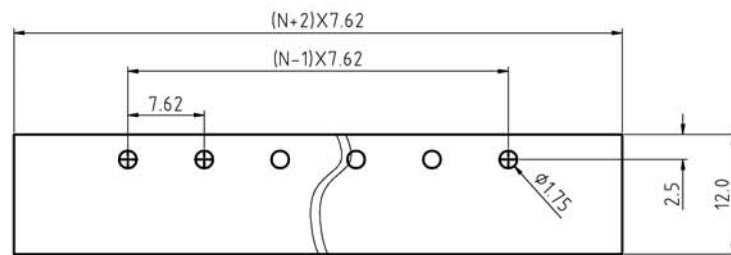

Technical Data:

Material:

Terminals: Copper Alloy, Tin Plated
Terminal screw: Steel galvanized with Cr3+ plated
Cover: PVC (UL94V-0)

Insulator body (housing): Polyamide (Glass filled) (UL94V-0)

Electrical

Voltage rating: 300VAC
Current rating: 10 Amps/way max
Contact resistance: 20mΩ (max)
Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs
Wire range: 14-22AWG

Mechanical:

Torque: 8kgf.cm/M3.0
Operating temperature: -40°C to +105°C
Soldering reliability:
Test temperature= 250°C±10°C
5 seconds max

Ordering Information:

U230 - 9 - G XX - X X X 0

- A Black Pa66
- B Black Pbt
- 1 With flange
- 2 Without flange
- 1 "-" Screw Cr³⁺
- 2 "-/+ " Screw Cr³⁺
- 3 "-" Screw Ni Plated
- 4 "-/+ " Screw Ni Plated
- 02 2Pin
- To To
- 32 32Pin

WELINK 上海拓尔普电子科技有限公司
Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME: U230-9 Pitch 7.62mm series With flange
X. ±0.50	CHECKED:	
X.X ±0.30	DRAWN: Yang Ming 2013.10.18	
X.XX ±0.20	UNITS: mm REV: A PART NO: U2309GXX21B0	
X° ±1°	SCALE: 2 / 1 PAGE: 1 / 1 DWG NO: 9U2309101A	

1 2 3 4 5