





1	2	3	4	5
SIGN		DESCRIPTION		DATE APPROVER

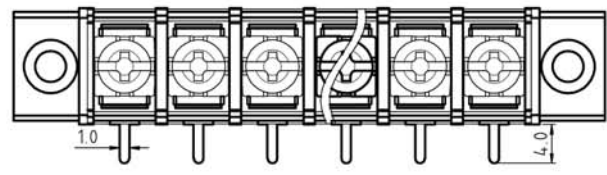

N=Number of contacts

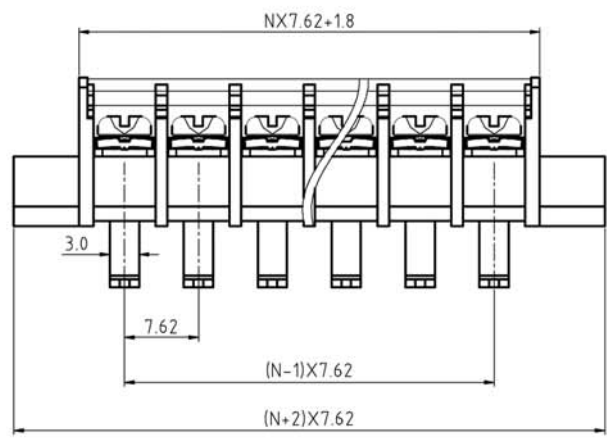

P.C.B LAYOUT

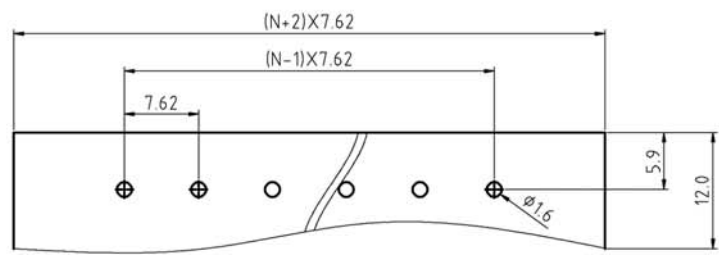

Technical Data:  
Material:  
Terminals: Copper Alloy, Tin Plated  
Terminal screw: Steel galvanized with Cr3+ plated  
Cover: PVC(UL94V-0)  
Insulator body(housing): Polyamide (Glass filled)(UL94V-0)  
Electrical  
Voltage rating: 300VAC  
Current rating: 10 Amps/way max  
Contact resistance: 20mΩ (max)  
Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs  
Wire range: 14-22AWG  
Mechanical:  
Torque: 8kgf.cm/M3.0  
Operating temperature: -40°Cto+105°C  
Soldering reliability:  
Test temperature= 250°C±10°C  
5 seconds max  
Ordering Information:

U230 -5 - G XX - X X X 0

- A Black Pa66
- B Black Pbt
- 1 With flange
- 2 Without flange
- 1 "-"Screw Cr<sup>3+</sup>
- 2 "-/+ "Screw Cr<sup>3+</sup>
- 3 "-"Screw Ni Plated
- 4 "-/+ "Screw Ni Plated
- 02 2Pin
- To To
- 32 32Pin

<b>WELINK</b> 上海拓尔普电子科技有限公司		Welink International Co., LTD.	
TOLERANCE	APPROVED:	NAME:	U230-5 Pitch 7.62mm
X. ±0.50	CHECKED:		series With flange
X.X ±0.30	DRAWN: Yang Ming 2013.10.18	PART NO:	U2305GXX21B0
X.XX ±0.20	UNITS: mm REV: A	DWG NO:	9U2305101A
X° ±1°	SCALE: 2/1 PAGE: 1/1		