

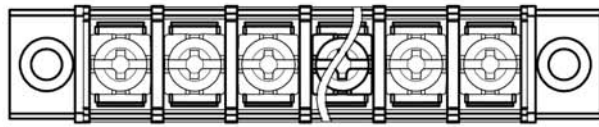



1	2	3	4	5
SIGN		DESCRIPTION		DATE APPROVER

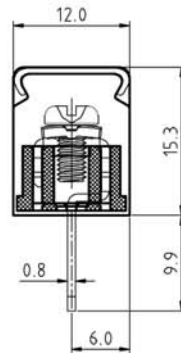

N=Number of contacts

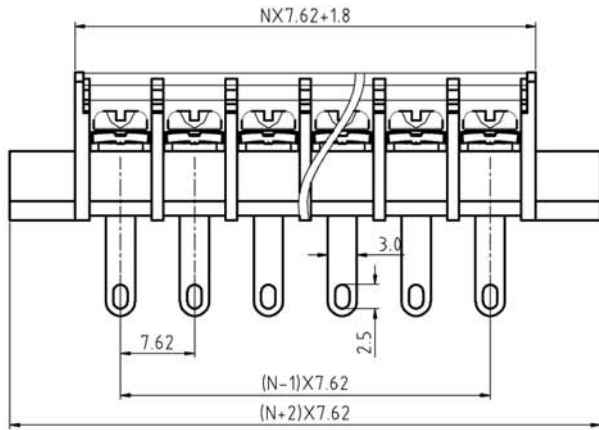

P.C.B LAYOUT

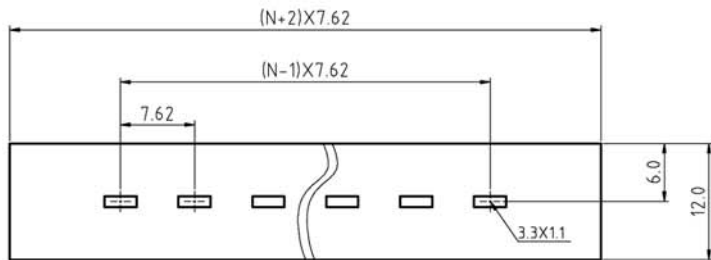

Technical Data:

Material:

Terminals: Copper Alloy, Tin Plated  
 Terminal screw: Steel galvanized with Cr3+ plated  
 Cover: PVC(UL94V-0)

Insulator body(housing): Polyamide (Glass filled)(UL94V-0)

Electrical

Voltage rating: 300VAC  
 Current rating: 10 Amps/way max  
 Contact resistance: 20mΩ (max)  
 Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs  
 Wire range: 14-22AWG

Mechanical:

Torque: 8kgf.cm/M3.0  
 Operating temperature: -40°C to +105°C  
 Soldering reliability:  
 Test temperature= 250°C±10°C  
 5 seconds max

Ordering Information:

U230 -4 - G XX - X X X 0

- A Black Pa66
- B Black Pbt
- 1 With flange
- 2 Without flange
- 1 "-"Screw Cr<sup>3+</sup>
- 2 "-/+ "Screw Cr<sup>3+</sup>
- 3 "-"Screw Ni Plated
- 4 "-/+ "Screw Ni Plated
- 02 2Pin
- To To
- 32 32Pin

**WELINK** 上海拓尔普电子科技有限公司  
 Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME: U230-4 Pitch 7.62mm
X: ±0.50	CHECKED:	series With flange
X.X ±0.30	DRAWN: Yang Ming 2013.10.18	
X.XX ±0.20	UNITS: mm REV: A	PART NO: U2304GXX21B0
X° ±1°	SCALE: 2/1 PAGE: 1/1	DWG NO: 9U2304101A