

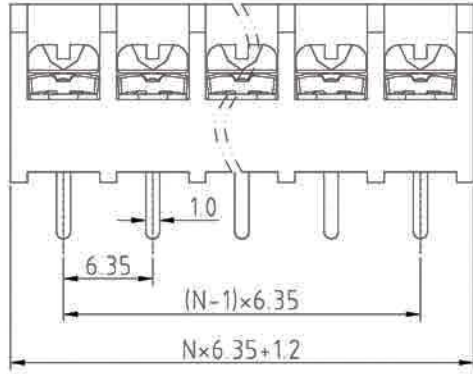
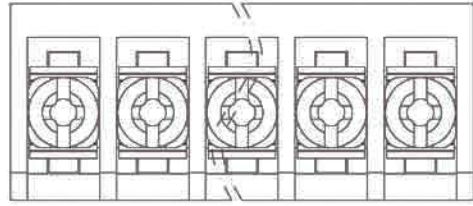


SIGN	DESCRIPTION	DATE	APPROVER

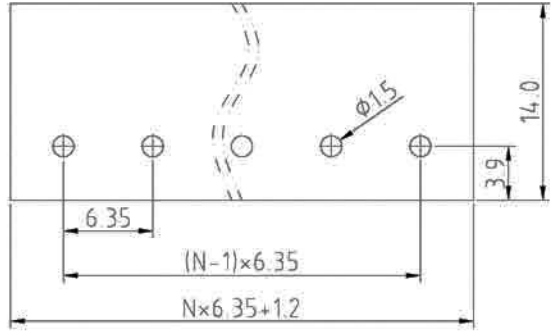

N=Number of contacts

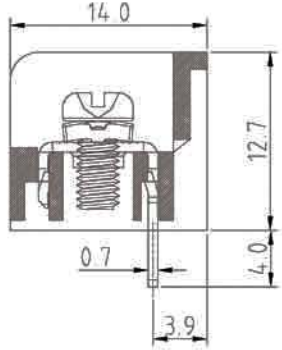

P.C.B. LAYOUT

Technical Data:

Material:

- Terminals: Copper Alloy Tin plated
- Terminal screw: Steel galvanized with Cr3+ plated
- Insulator body(housing): Polyamide (Glass filled)(UL94V-0)

Electrical:

- Voltage rating: 250VAC
- Current rating: 10 Amps/way max
- Contact resistance: 20m Ω (max)
- Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs
- Wire range: 18-22AWG

Mechanical:

- Torque: 7kgf.cm/M3.0
- Operating temperature: -40°C to +105°C
- Soldering reliability: Test temperature= 250°C ± 10°C, 5 seconds max

Ordering Information:

U 3 2 2 - 2 - F X X - X X X 0

- A Black Pa66
- B Black Pbt
- 1 With flange
- 2 Without flange
- 1 "-"Screw Cr³⁺
- 2 "-/+ "Screw Cr³⁺
- 3 "-"Screw Ni Plated
- 4 "-/+ "Screw Ni Plated
- 02 2Pin
- To To
- 32 32Pin

WELINK

上海拓尔普电子科技有限公司
Welink International Co.,LTD.

TOLERANCE	APPROVED:	NAME
X ±0.50	CHECKED:	U322-2 Pitch 6.35mm- Without flange series
XX ±0.30	DRAWN: Ling Yu 2014,01,04	
XXX ±0.20	UNITS: mm REV: A	PART NO: U3222FXX22X0
X* ±*	SCALE 2.5 / 1 PAGE: 1 / 1	DWG NO: 9U3222F01A