





SIGN	DESCRIPTION	DATE	APPROVER

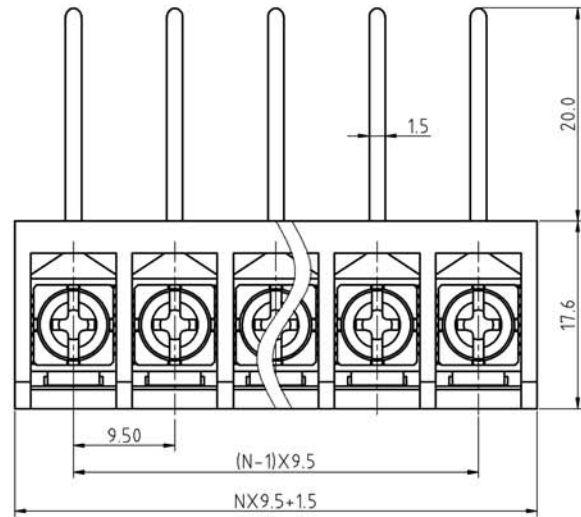

N=Number of contacts

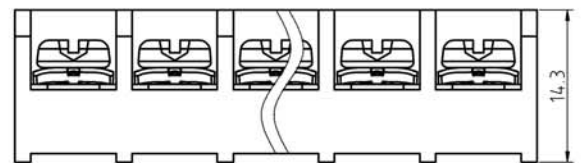

P.C.B LAYOUT

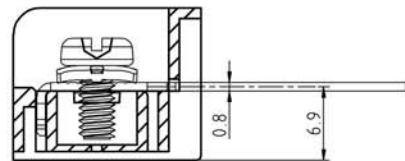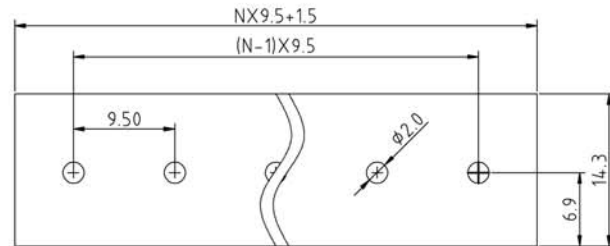

Technical Data:

Material:

Terminals: Copper Alloy, Tin Plated  
Terminal screw: Steel galvanized with Cr<sup>3+</sup> plated  
Insulator body(housing): Polyamide (Glass filled)(UL94V-0)

Electrical

Voltage rating: 300VAC  
Current rating: 25 Amps/way max  
Contact resistance: 20m Ω (max)  
Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs  
Wire range: 12-22AWG

Mechanical:

Torque: 12kgf.cm/M3.5  
Operating temperature: -40°C to +105°C  
Soldering reliability:  
Test temperature= 250°C±10°C  
5 seconds max

Ordering Information:

U344 -8 - 9 XX - X X X 0

A Black Pa66  
B Black Pbt

1 With flange  
2 Without flange

1 "-"Screw Cr<sup>3+</sup>  
2 "-/+ "Screw Cr<sup>3+</sup>  
3 "-"Screw Ni Plated  
4 "-/+ "Screw Ni Plated

02 2Pin  
To To  
32 32Pin

**WELINK** 上海拓尔普电子科技有限公司  
Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME:
X ±0.50	CHECKED:	U344-8 Pitch 9.5mm
X.X ±0.30	DRAWN: Yang Ming 2011,07,15	Without flange series
X.XX ±0.20	UNITS: mm REV: A	PART NO: U34489XX22B0
X° ±1°	SCALE: 2 / 1 PAGE: 1 / 1	DWG NO: 9U3448002A